



**315
CARICATORI**

1

LOADERS

Sistemi automatici per l'approvvigionamento preciso e costante dei rotoli di tessuto sugli stenditori. Garantiscono efficienza, sincronismo e massima produttività all'intera linea.
Automated system to manage the feeding of fabric rolls to the spreader. Improve productivity, reduce cost in time and handling and improve the productivity of the entire line.


315

CARICATORI - LOADERS

Singolo da terra; Single from the ground

Solida struttura metallica fissata all'inizio del tavolo di stesura. L'operatore controlla, tramite apposito pannello di comando, il sistema motorizzato di sollevamento pezza, adagiata su un supporto a culla. Un apposito meccanismo automatico di inclinazione della culla agevola lo scarico automatico della pezza sulla torretta della stenditrice. Disponibile nella versione con portata max 100KG oppure 200kg.

Solid metallic structure fixed at the beginning of spreading table. Motorized lifting device of the roll on proper cradle support is controlled by the operator through control panel. Roll unloading onto spreader turret is facilitated by proper device for automatic cradle bending. Available version with max capacity 100 Kg or version with max capacity 200Kg

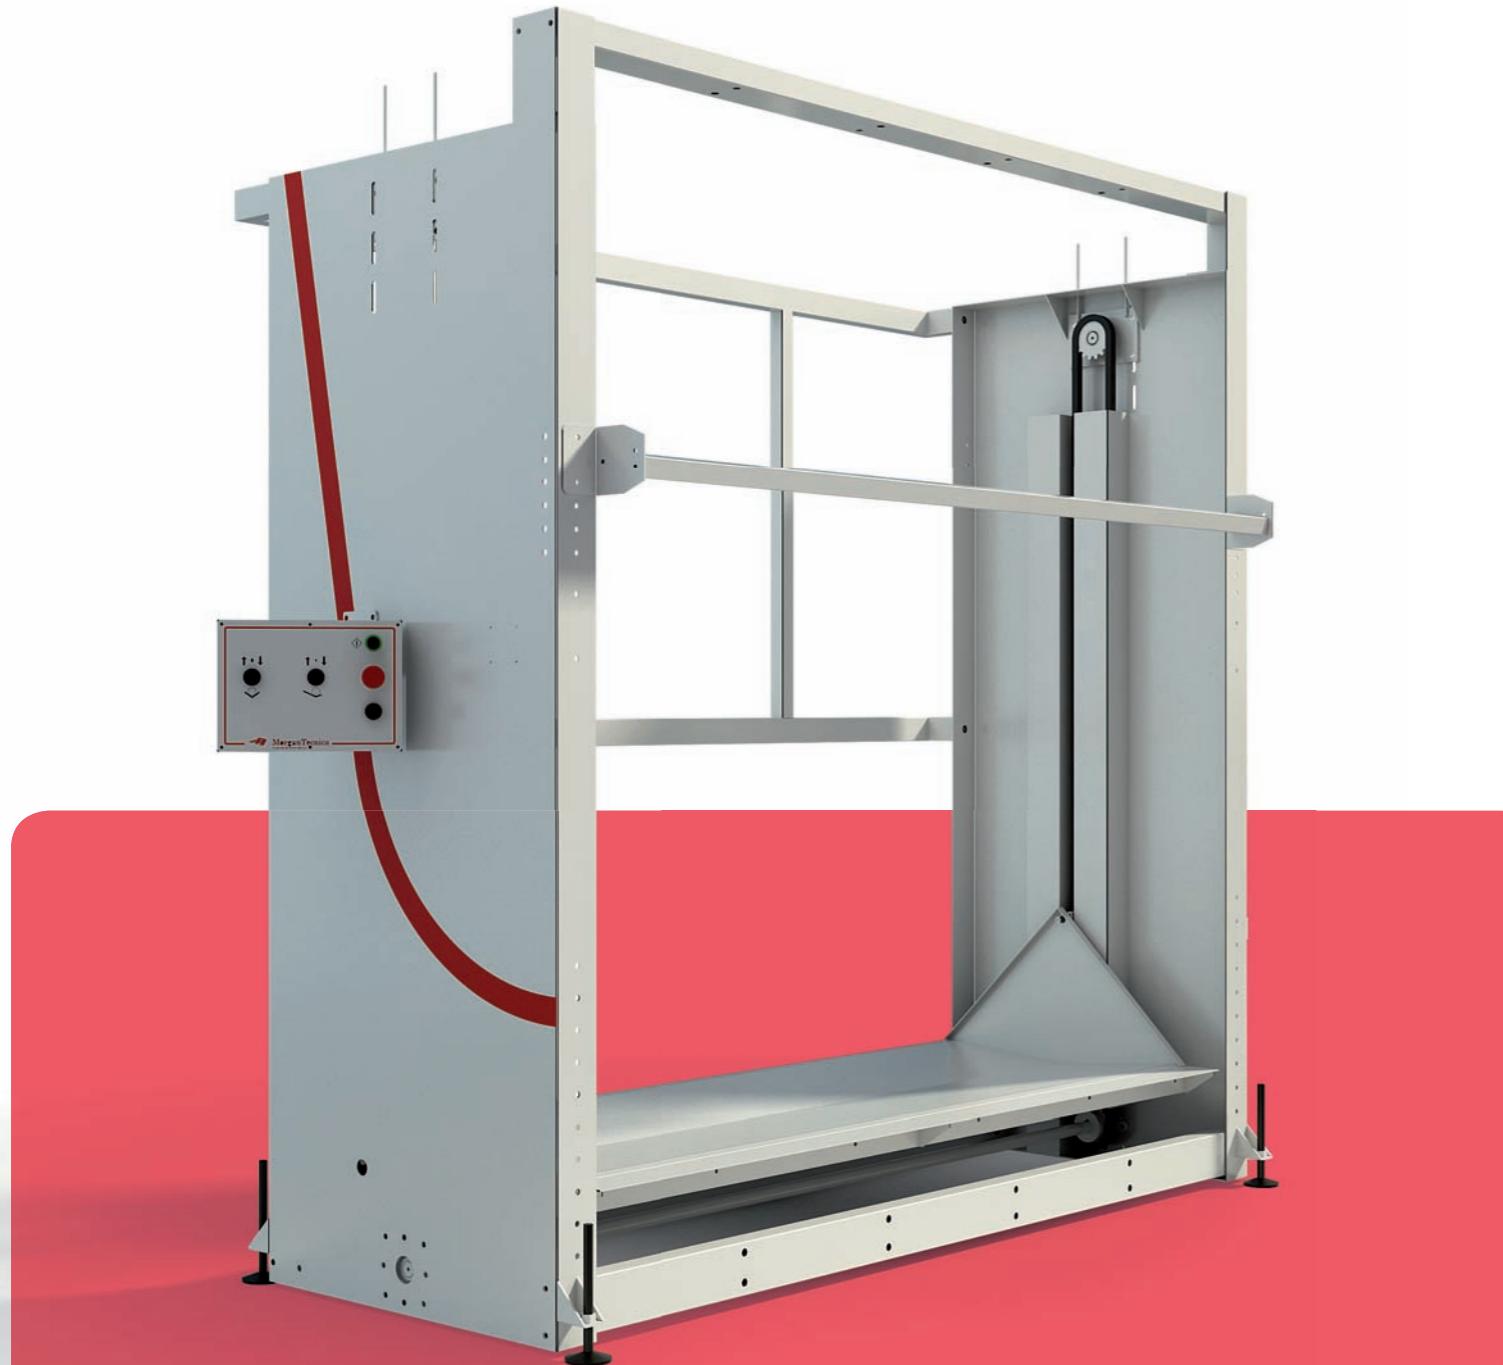

CARATTERISTICHE TECNICHE :

Capacità 100/200 Kg
Voltaggio 400V 3Ph 50/60 Hz
Altezza utile 180/230 cm

TECHNICAL SPECIFICATIONS:

Capacity 100/200 Kg
Voltage 400V 3Ph 50/60 Hz
Fabric width 180/230 cm